



H

GT[®] 80H

GT-AIR FILTER DEVICE **GT 80H**

For heavy air pollution caused
by oil, soluble oils and
general cooling lubricants

EXPERTISE IN FILTERS
SINCE 1992

TECHNICAL DATA

GT[®] 80H

HEAVY POLLUTION



Liquid and solid particles in the aerosol range.
Particle sizes between 0,01 and 10 µm. Visible on dispersion.
Occurs when using cooling lubricants containing pure oil and soluble oils.

Occurs in the event of high cutting speeds and/or with high pressure of cooling lubricants.

8000 m³/h

≥ 0.3 µm


99.97%

STANDARD AND TURNKEY SOLUTION

All GT air filter devices of performance classes 20, 40 and 80 can be installed as a stand-alone solution or as a central unit for several pollution sources. Individual configuration and design in response to the company-specific production environment and applicable environmental requirements is possible.

Nominal volume flow in m ³ /h	8000
Power in kW max.*	11/15
Drive type	regulated, inverter incl.
Connection V Hz phases	400/460 50/60 3
Storage space in m ²	2.49
L x W x H in mm	2202 x 1368 x 3995
Weight in kg	1750
Total filter surface in m ² *	211.4/254.2
1. Filter stage in m ² *	48/45
2. Filter stage in m ² *	54.0/61.2
3. Filter stage in m ² *	109.4/148
4. Filter stage in m ²	n. a.
Air connection NW in mm	400
Ø free oil drain"	R 1 ¼
Ø outlet oil return pump"	G ¾

* depends on application

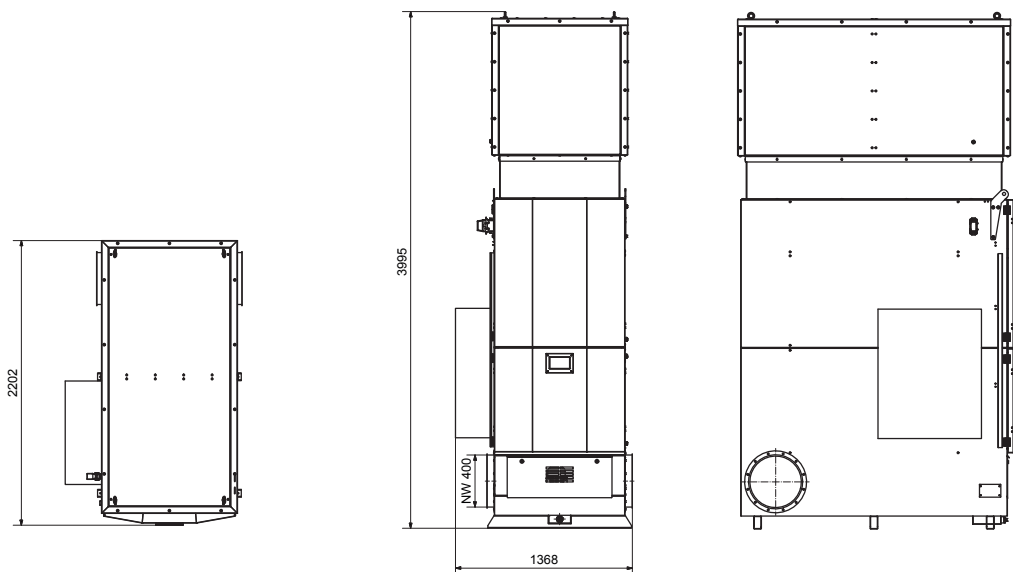

Subject to technical modifications. As of 05/2017
© GTI Glob Tec Industriemaschinen GmbH

GTI Glob Tec Industriemaschinen GmbH | Richard-Stocker-Str. 19 | 78234 Engen | Germany
Phone +49 7733 9482802 | info@gti-globtec.com | gti-globtec.com



EXPERTISE IN FILTERS
SINCE 1992